

# HDX-1200DC

## HOT SWAP - 1200 WATTS - 1U HIGH

125 TO 350 VOLTS DC  
I<sup>2</sup>C OPTION FOR IPMI COMPATIBILITY




### FEATURES:

- Size: 1.6" x 5" x 10" in Size**
- Low Profile - Only 1.6" high!**
- N+1 Redundant and Hot Swap**
- 15w/in<sup>3</sup> Power Density**
- Meets FCC Class A**
- No Additional Cooling Required up to 50 °C**
- 'Zero' Wire Current Share**
- Remote Sense**
- No Minimum Load Required**
- Includes Standby Output 5V/0.25A**
- Integral LED Status Indicators**
- Greater than 90,000 Hrs MTBF (500,000 Hrs in Redundancy)**

#### Standard Configurations Available :

	<b>OUTPUT VOLTAGE (VDC)</b>	<b>OUTPUT AMPERES (MAX)</b>	<b>OUTPUT POWER (WATTS)</b>
<b>+V1</b>	<b>48Vdc</b>	<b>25</b>	<b>1200</b>
<b>+V1</b>	<b>24Vdc</b>	<b>41.7</b>	<b>1000</b>
<b>+V1</b>	<b>12Vdc</b>	<b>66.7</b>	<b>800</b>


# HDX-1200DC SERIES - 1200 WATT COMPACT SIZE

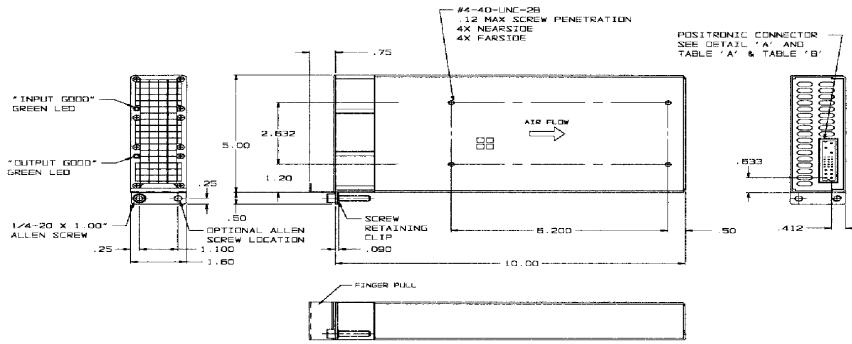

- NOTES:
1. TOTAL OUTPUT POWER NOT TO EXCEED 1200 WATTS.
  2. TABLE "A" IS WITH I2C OPTION
  3. TABLE "B" IS WITHOUT I2C OPTION
  4. CONSULT FACTORY FOR FURTHER ELECTRICAL AND/OR MECHANICAL SPECIFICATIONS

TABLE "A" WITH I2C OPTION POSITRONIC P/N PCB24W9M400A1 MATES WITH PCB24W9F400A1	
PIN #	DESCRIPTION
1	+VOUT
2	+VOUT
3	+VOUT
4	RTN
5	RTN
6	RTN
7	ENABLE
8	-SENSE
9	-SENSE
10	INHIBIT
11	SDA
12	SCLK
13	MODULE PRESENT
14	GA1
15	INPUT POWER FAIL
16	N/C
17	N/C
18	N/C
19	5V SB
20	+5V SB RTN
21	+5V SB RTN
22	CHASSIS GROUND
23	DC (+)
24	DC (-)

TABLE "B" WITHOUT I2C OPTION POSITRONIC P/N PCB24W9M400A1 MATES WITH PCB24W9F400A1	
PIN #	DESCRIPTION
1	+VOUT
2	+VOUT
3	+VOUT
4	RTN
5	RTN
6	RTN
7	ENABLE
8	-SENSE
9	-SENSE
10	INHIBIT
11	N/C
12	N/C
13	MODULE PRESENT
14	DC POWER GOOD
15	INPUT POWER FAIL
16	N/C
17	N/C
18	OVERTEMP WARNING
19	VI CURRENT MONITOR
20	+5V SB
21	+5V SB RTN
22	CHASSIS GROUND
23	DC (+)
24	DC (-)



DETAIL "A"  
SCALE: 2:1  
ROTATED 90° CW

<b>Nominal Input Voltage</b>	250VDC, 6 amps max.	<b>Paralleling</b>	Two or more supplies can be operated in parallel and will share current to within ±10% of each other.
<b>Operational Input Voltage Range</b>	125 to 350 VDC	<b>Redundant</b>	Full power N+1 redundant with integral Oring Diodes.
<b>Inrush Current</b>	Less than 4 msec. 150 amps at 250VDC	<b>Remote Sense</b>	Compensates for up to 0.5V total distribution voltage drop.
<b>Fusing</b>	20 Ampere, 250 VAC, Internal ceramic body fuse.	<b>INHIBIT</b>	Open to Run, Contact closure to return , turns off all outputs.
<b>Hold up time</b>	20msec minimum after loss of DC Input at full load and any input.	<b>ENABLE</b>	Closed to run. Contact closure to return, turns on all outputs.
<b>Efficiency</b>	80-85% typical	<b>Input POWER FAIL</b>	Normal logic '0' TTL signal which goes high whenever the DC line drops below 120volts. Provides 4msec warning before outputs go out of regulation.
<b>Turn on time</b>	1 sec max. from power up.	<b>Indicators</b>	Green LED indicating Input Good, Green LED indicating output Good.
<b>Line and Load Regulation</b>	±2% over DC input range and 0 to 100% load change.	<b>Output Power Good</b>	Provides logic Low signal when V1 is within 90% of it's rating.
<b>Minimum Load</b>	No minimum load required.	<b>Over Temp Warning</b>	Provides a logic High signal at least 1 sec before supply shuts down.
<b>Ripple &amp; Noise</b>	Through 20MHz 0.5% max. peak to peak, with coaxial probe and 0.1uF/10uF capacitors at the connector.	<b>Operating Temperature</b>	-20°C to 50°C operating temperature. 50°C to 75°C, derate 2%/°C. (Below 150VDC input, +48V power varies with temperature, consult factory for rating curves).
<b>Transient Response</b>	Output maximum excursion of ± 4% for 25% load step. Recovery less than 300 µsec.	<b>Stability</b>	All outputs ±0.2% for 8 hrs. after 30 minute warm-up. All outputs ±0.5% during 30 minute warm-up.
<b>Overshoot/Undershoot</b>	No turn-on or turn-off overshoot.	<b>Humidity</b>	Up to 95% non-condensing.
<b>Output Isolation</b>	Isolated from chassis ground, 50Vdc.	<b>Storage Temperature</b>	-40°C to 85°C.
<b>Input/Output Isolation</b>	2200 VDC from input to both chassis/outputs. SELV construction.	<b>Connector</b>	Positronic Part No. PCB24W9M400A1
<b>Reverse Voltage</b>	Protected against reverse voltage to supply current rating.	<b>Size</b>	1.6" x 5" x 10" <b>Weight:</b> 4 lbs.
<b>Overvoltage Protection</b>	Clamp at 130% of nominal Vout.	<b>EMC</b>	Meets FCC Class A conducted. External filter required for EN55022 Level A.
<b>Overtemperature Protection</b>	Unit shuts down if overheated. Recycle DC to reset.	<b>Safety</b>	Meets UL 60950 / CSA C22.2 No. 60950, EN60950.
<b>Current Limiting</b>	V1 short circuit protected with foldback protection. 5VSB Foldback.		

Standby Output: +5V/0.25A, First On, Last Off. Remains ON during all fault conditions.