

HDX-800-DC

HOT SWAP - 800 WATTS - 1U HIGH

36-75VDC INPUT
I²C OPTION FOR IPMI COMPATIBILITY



FEATURES:

- Size: 1.6" x 5" x 10" in Size**
- Low Profile - Only 1.6" high!**
- N+1 Redundant and Hot Swap**
- 10w/in³ Power Density**
- Meets FCC Class A**
- No Additional Cooling Required up to 50 °C**
- Wide Range Input (36-75VDC)**
- 'Zero' Wire Current Share**
- Remote Sense**
- No Minimum Load Required**
- Includes Standby Output 5V/0.25A**
- Integral LED Status Indicators**
- Greater than 90,000 Hrs MTBF (500,000 Hrs in Redundancy)**

Standard Configurations Available :

	OUTPUT VOLTAGE (VDC)	OUTPUT AMPERES (MAX)	OUTPUT POWER (WATTS)
+V1	48Vdc	16.7	800
+V1	24Vdc	33.3	800
+V1	12Vdc	66.7	800

HDX-800-DC SERIES - 800 WATT COMPACT SIZE


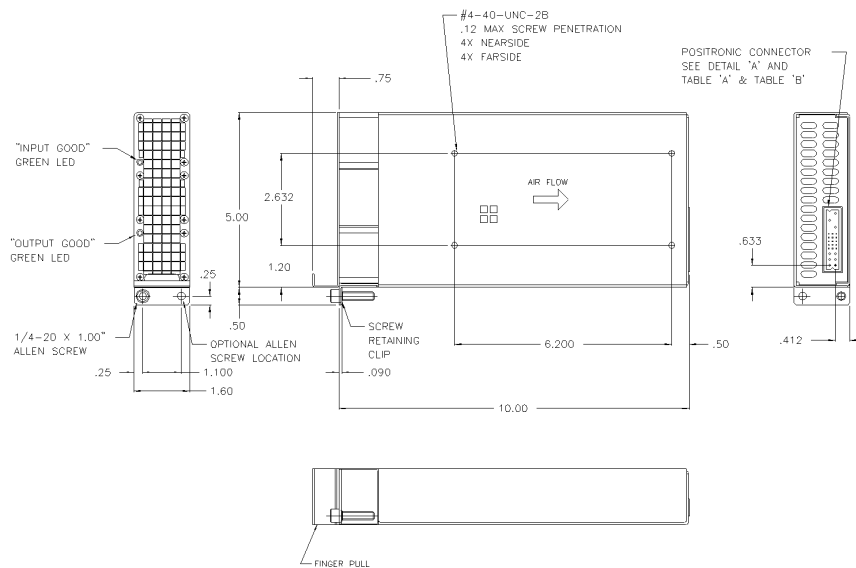


TABLE 'A' WITH I2C OPTION POSITRONIC P/N PCB24W9M400A1 MATES WITH PCB24W9F400A1	
PIN #	DESCRIPTION
1	+VOUT
2	+VOUT
3	+VOUT
4	RTN
5	RTN
6	RTN
7	ENABLE
8	+SENSE
9	-SENSE
10	INHIBIT
11	SDA
12	SCLK
13	MODULE PRESENT
14	GA1
15	N/C
16	N/C
17	GA0
18	N/C
19	GA2
20	+5V SB
21	+5V SB RTN
22	CHASSIS GROUND
23	-48VDC
24	-48VDC RTN

TABLE 'B' WITHOUT I2C OPTION POSITRONIC P/N PCB24W9M400A1 MATES WITH PCB24W9F400A1	
PIN #	DESCRIPTION
1	+VOUT
2	+VOUT
3	+VOUT
4	RTN
5	RTN
6	RTN
7	ENABLE
8	+SENSE
9	-SENSE
10	INHIBIT
11	N/C
12	N/C
13	MODULE PRESENT
14	DC POWER GOOD
15	N/C
16	N/C
17	OVERTEMP WARNING
18	N/C
19	V1 CURRENT MONITOR
20	+5V SB
21	+5V SB RTN
22	CHASSIS GROUND
23	-48VDC
24	-48VDC RTN



DETAIL 'A'
SCALE: 2/1
ROTATED 90° CW

Nominal Input Voltage -48VDC, 25A max.

Operational Input Voltage Range 36-75 VDC

Inrush Current Less than 5 msec. 45 amperes @ -48VDC.

Fusing 40 Ampere, 125 VDC.

Hold up time 1msec minimum after loss of DC Input at full load and any input.

Efficiency 80-85% typical

Turn on time 1 sec max. from power up.

Line and Load Regulation ±2% over DC input range and 0 to 100% load change.

Minimum Load No minimum load required.

Ripple & Noise Through 20MHz 0.5% max. peak to peak, with coaxial probe and 0.1uF/10uF capacitors at the connector.

Transient Response Output maximum excursion of ± 4% for 25% load step. Recovery less than 300 µsec.

Overshoot/Undershoot No turn-on or turn-off overshoot.

Output Isolation Isolated from chassis ground, 50Vdc.

Input/Output Isolation 1500 VDC from input to both chassis/outputs. SELV construction.

Reverse Voltage Protected against reverse voltage to supply current rating.

Overvoltage Protection Clamp at 130% of nominal Vout.

Overtemperature Protection Unit shuts down if overheated. Recycle DC to reset.

Current Limiting V1 short circuit protected with foldback protection. 5VSB Foldback.

Paralleling Two or more supplies can be operated in parallel and will share current to within ±10% of each other.

Redundant Full power N+1 redundant with integral Oring Diodes.

Remote Sense Compensates for up to 0.5V total distribution voltage drop.

INHIBIT Open to Run, Contact closure to return , turns off all outputs.

ENABLE Closed to run. Contact closure to return, turns on all outputs.

Indicators Green LED indicating Input Good, Green LED indicating output Good.

Output Power Good Provides logic Low signal when V1 is within 90% of it's rating.

Over Temp Warning Provides a logic High signal at least 1 sec before supply shuts down.

Operating Temperature -20°C to 50°C operating temperature. 50°C to 75°C, derate 2%/°C.

Stability All outputs ±0.2% for 8 hrs. after 30 minute warm-up. All outputs ±0.5% during 30 minute warm-up.

Humidity Up to 95% non-condensing.

Storage Temperature -40°C to 85°C.

Connector Positronic Part No. PCB24W9M400A1

Size 1.6" x 5" x 10" **Weight:** 4 lbs.

EMC Meets FCC Class A conducted. External filter required for EN55022 Level A.

Safety Meets UL 60950 / CSA C22.2 No. 60950, EN60950.

Standby Output: +5V/0.25A, First On, Last Off. Remains ON during all fault conditions.

REV: -