

HOT SWAP RACK MODEL HDXRK-600-DC




- ◆ 36 - 75 VDC WIDE RANGE INPUT
- ◆ ONLY 1U HIGH (1.73")
- ◆ I²C SERIAL DATA BUS OPTION
- ◆ 600 WATT HOT SWAP RACK SYSTEM USING TWO HDX-600-DC PLUG-IN MODULES
- ◆ 19" or 24" RACK MOUNTABLE
- ◆ LEDS INCLUDED INDICATE INDIVIDUAL POWER SUPPLY STATUS
- ◆ N+1 REDUNDANCY PROVIDED WITH INTEGRAL "ORING" DIODES
- ◆ EASY INPUT / OUTPUT CONNECTIONS PROVIDED
- ◆ CLASS B EMI INPUT FILTER AND STANDARD TERMINAL BLOCK INPUT
- ◆ OUTPUT CAPABILITY:

V1 AT 80A Max

V2 AT 40A Max

V3 AT 12A Max

V4 AT 4A Max

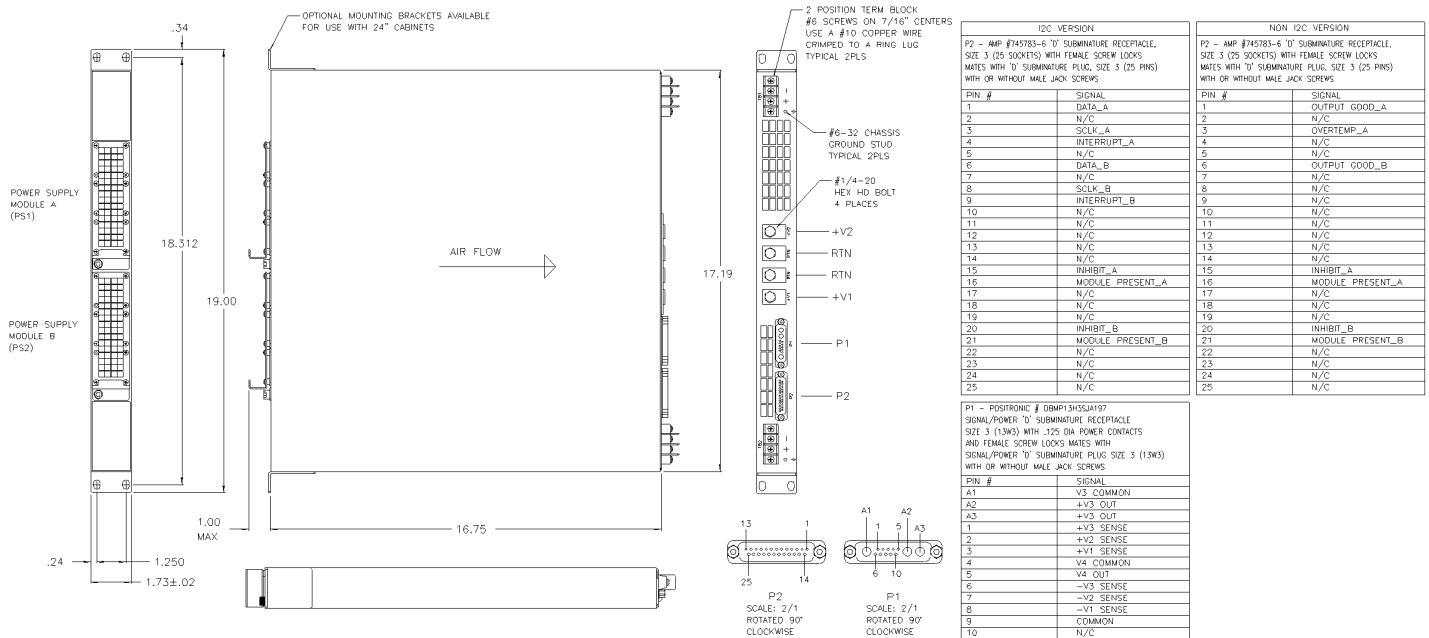

REV: -